



**NOTES**

1. ALL PAVEMENT MARKING AND TRAFFIC SIGNS TO BE IN ACCORDANCE WITH DEPARTMENT OF MAIN ROADS "MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES".
2. LINEMARKING TO PARKING BAYS TO BE WHITE 100mm WIDE AND SHALL BE AN APPROVED WATERBORNE ROAD MARKING PAINT CONFORMING TO THE REQUIREMENTS OF AS 4049.3.
3. ALL REDUNDANT PAVEMENT MARKINGS ARE TO BE REMOVED BY GRINDING.
4. ALL STREET SIGN AND TRAFFIC SIGNS TO BE INSTALLED IN ACCORDANCE WITH FNQROC STD DRG S1040 AND S1041.
5. BOLLARDS TO BE TIMBER BOLLARDS IN ACCORDANCE WITH FNQROC STD DRG S4300
6. CONCRETE PATHWAYS TO BE CONSTRUCTED IN ACCORDANCE WITH FNQROC STD DRG S1035.

**LINEMARKING LEGEND**

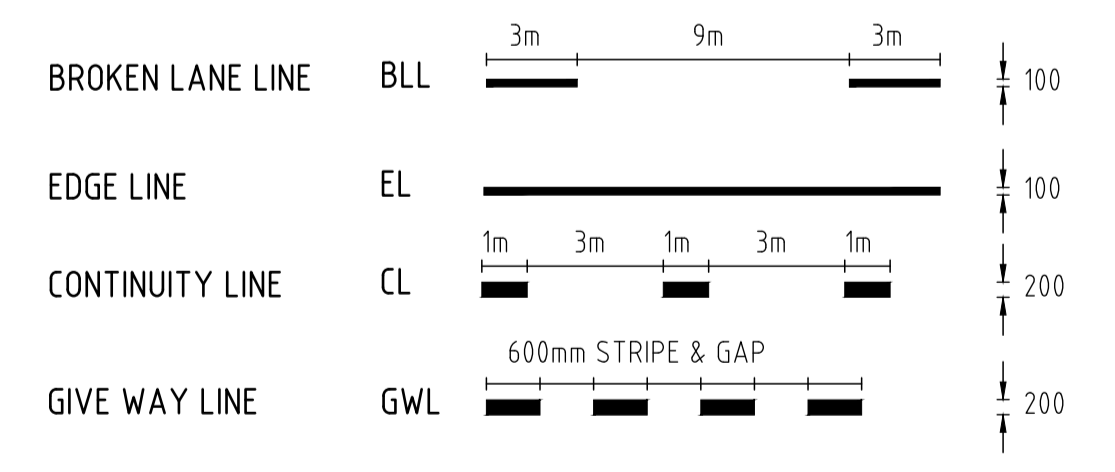

**LEGEND**

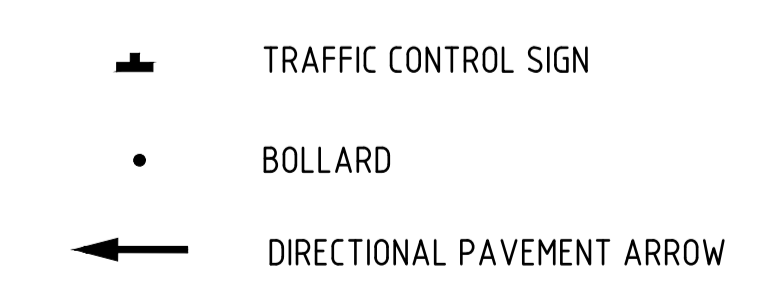

issue		amendments		<b>C.M.G. CONSULTING ENGINEERS</b> PTY. LTD. <small>AC.N. 011 065 375 STRUCTURAL AND CIVIL</small> 208 Buchan Street Cairns, 4870. Phone: (07) 4031 2775 P.O. Box 5901 Cairns Mail Centre Fax: (07) 4051 9013	<b>RTA</b> MOBILE VENDOR PARKING HOSPITAL ROUNDABOUT, WEIPA TOWNSHIP TITLE: PAVEMENT MARKING & SIGNAGE	SCALE (AT A1 SIZE)	1:200	DRAWN	-
A	CONSTRUCTION ISSUE	24.09.18				DESIGNED	-		
				DATE	SEPT 2018	CHECKED	C.M.G.		
				APPROVED	<i>[Signature]</i>				
				DWG NUMBER	39847-C03	AMDT	A		